

SPECIFICATIONS

ALL DIMENSIONS IN MILLIMETRES.
 OPTIONAL EMULSIFIED ASPHALT COMPOUND COATING ON BACK.

CONCRETE:

45 MPa @ 28 DAYS,
 5-7% AIR ENTRAINMENT IN ACCORDANCE WITH CSA A23.4.00.

REINFORCING:

REINFORCING DETAILS PROVIDED UPON REQUEST.

WEIGHT:

4.1 TONNES

BACKFILL:



BACKFILL BEHIND L-WALLS IS TO BE FREE DRAINING
 GRANULAR MATERIAL.

EMBANKMENT:

SLOPE AND SURCHARGE SITUATIONS TO BE CHECKED
 AND VERIFIED TO AVOID OVERLOAD CONDITIONS.

FOUNDATION:

BEARING STRATA AND SUB-BASE TREATMENT
 TO GEO-TECHNICAL ENGINEER REQUIREMENTS.

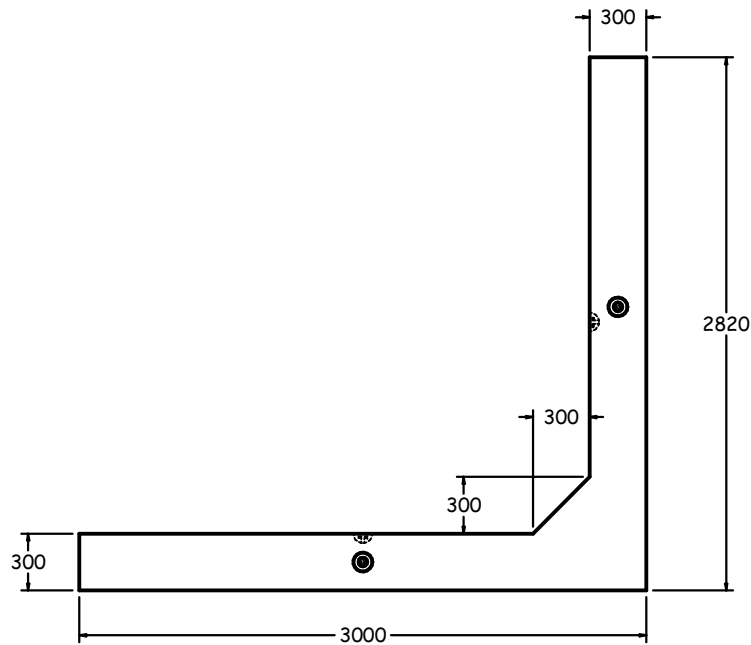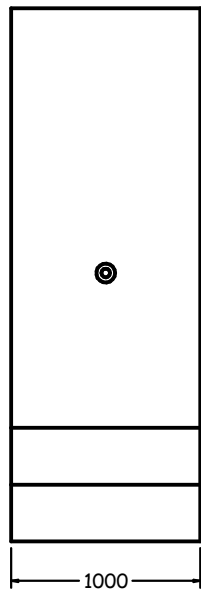

WINGWALL "L" COMPONENT



1645 SYDENHAM RD.
 KINGSTON, ONT.

PHONE:
 (800) 223-0012
 1-613-546-6683

www.anchorconcrete.com