


SIDE SECTION  
1:80

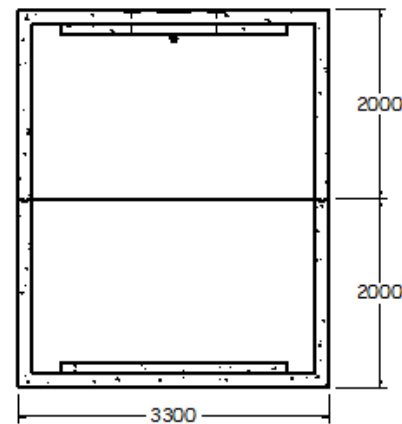

END SECTION  
1:80

## 14300 GAL SEPTIC TANK (ST3000)

### SPECIFICATIONS

ALL DIMENSIONS IN MILLIMETRES.

#### NOM. CAPACITY:

14300 GALLONS (65000 LITRES) TO INVERT OF OUTLET.  
103.6 GALLONS/IN. VERTICALLY.  
18992 LITRES/M VERTICALLY.

#### CONCRETE:

45 MPa @ 28 DAYS,  
5-8% AIR ENTRAINMENT IN ACCORDANCE  
WITH CSA A23.1 MOD-M90

#### REINFORCING:

IN ACCORDANCE WITH CSA G30.18.  
HEAVY DUTY VERSION DESIGNED TO CAN 56-06  
(C.H.B.D.C.) AVAILABLE.  
ALL REINFORCING STEEL HAS 30mm MIN. COVER.  
REINFORCING DETAILS AVAILABLE UPON REQUEST.

#### BAFFLES:

INLET: PVC PLASTIC LOCKED INTO CONCRETE.

#### INLET & OUTLET:

POLYLOK TYPE III PIPE SEALS FOR  
51 (2"), 76 (3") OR 102 (4") PIPE.

#### WEIGHT:

MONOBASE	-24240 KG
MONOTOP	-23890 KG

#### NOTES:

MAX. BURIAL DEPTH: 610mm.  
DEEP BURIAL TANKS AVAILABLE UPON REQUEST.

ACCESS OPTIONS AVAILABLE.

ABOVE GROUND INSTALLATION NOT PERMITTED.  
REFER TO INSTALLATION GUIDELINES FOR TANKS.



1645 SYDENHAM RD.  
KINGSTON, ONT.

PHONE:  
(800) 223-0012  
1-613-546-6683

www.anchorconcrete.com