

SPECIFICATIONS

ALL DIMENSIONS IN MILLIMETRES.

CONCRETE:


35 MPa @ 28 DAYS,
5-8% AIR ENTRAINMENT IN ACCORDANCE
WITH CSA A23.1-09

REINFORCING:


IN ACCORDANCE WITH OPSS 1440
ALL REINFORCING STEEL HAS 35mm MIN. COVER

NOTES:

- OTHER SIZES AVAILABLE BY SPECIAL REQUEST.
- STANDARD LENGTH OF 2500mm.
SHORTER LENGTHS AVAILABLE UPON REQUEST.
- REINFORCING DETAILS AVAILABLE UPON REQUEST.
- ALL PIECES INCLUDE SWIFT LIFT LIFTING ANCHORS.

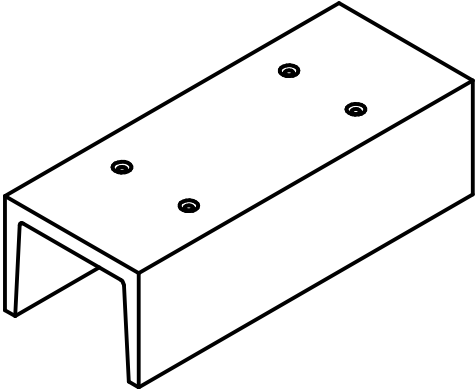

SIZE (SPAN x RISE)	OUTSIDE WIDTH	OUTSIDE HEIGHT
610x450	760	560
850x630	1000	740
1340x1140	1500	1250

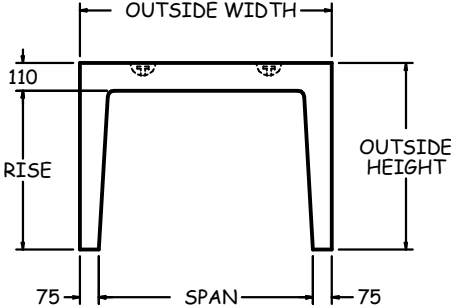

STEAM TRENCH



1645 SYDENHAM RD.
KINGSTON, ONT.

PHONE:
(800) 223-0012
1-613-546-6683

www.anchorconcrete.com