

SPECIFICATIONS

ALL DIMENSIONS IN MILLIMETRES.

CONCRETE:

35 MPa @ 28 DAYS,
5-8% AIR ENTRAINMENT IN ACCORDANCE
WITH CSA A23.1-09

REINFORCING:

IN ACCORDANCE WITH OPSS 1440
ALL REINFORCING STEEL HAS 35mm MIN. COVER

NOTES:


OTHER SIZES AVAILABLE BY SPECIAL REQUEST.

STANDARD LENGTH OF 2500mm.
SHORTER LENGTHS AVAILABLE UPON REQUEST.


REINFORCING DETAILS AVAILABLE UPON REQUEST.

ALL PIECES INCLUDE SWIFT LIFT LIFTING ANCHORS.

SIZE (SPAN x RISE)	OUTSIDE WIDTH	OUTSIDE HEIGHT
610x450	760	560
850x630	1000	740

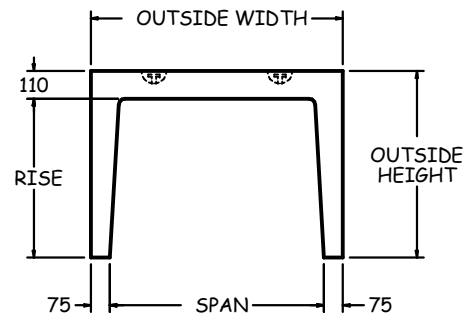

STEAM TRENCH

	1645 SYDENHAM RD. KINGSTON, ONT.
	PHONE: (800) 223-0012 1-613-546-6683
www.anchorconcrete.com	