


ISOMETRIC VIEW

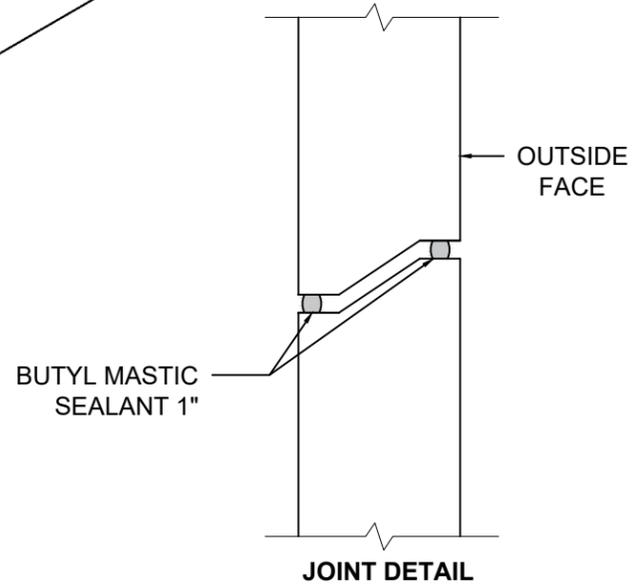

JOINT DETAIL

CAPACITY		H1		H2		H	
LITRE	GALLON	OUTSIDE	INSIDE	OUTSIDE	INSIDE	OUTSIDE	INSIDE
35000	7700	2100	1850	600	350	2700	2200
40000	8800	2100	1850	900	650	3000	2500
45000	9900	2100	1850	1150	900	3250	2750
50000	11000	2100	1850	1350	1100	3450	2950
55000	12100	2100	1850	1650	1400	3750	3250
60000	13200	2100	1850	1850	1600	3950	3450
65000	14300	2100	1850	2100	1850	4200	3700

CAPACITY		WEIGHT (tonne)		
LITRE	GALLON	BASE	TOP	ALL
35000	7700	36	18.3	54.3
40000	8800	36	21.6	57.6
45000	9900	36	24.3	60.3
50000	11000	36	26.4	62.4
55000	12100	36	29.6	65.6
60000	13200	36	31.8	67.8
65000	14300	36	34	70

NOTES:

ALL DIMENSIONS IN MILLIMETERS UNLESS OTHERWISE STATED.

NOT TO SCALE

NON TRAFFIC RATED, TRAFFIC RATED DESIGNS AVAILABLE UPON REQUEST


CUSTOM ACCESS OPENINGS, RISERS, AND HATCHES AVAILABLE UPON REQUEST

MAX DEPTH OF COVER = 1500mm

TYP. SLAB THICKNESS = 250mm

TANK DELIVERED IN TWO PIECES, TO BE ASSEMBLED ON SITE BY OTHERS

ALL LIFTING ANCHORS ARE TO BE DAYTON SUPERIOR OR APPROVED ALTERNATIVE. ALL RIGGING, HOISTING, AND LIFTING TO BE IN STRICT ACCORDANCE WITH DAYTON SUPERIOR MANUAL.

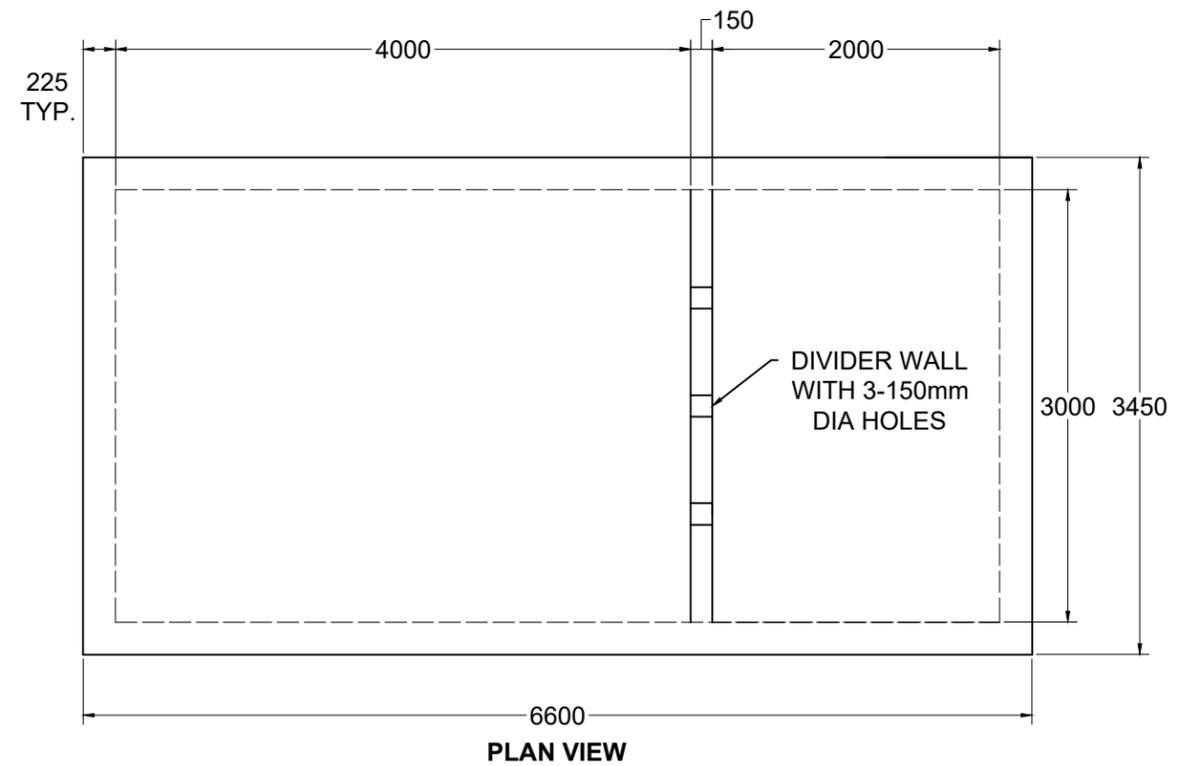

PLAN VIEW

SPECIFICATIONS:
PRODUCT DESIGNED IN ACCORDANCE WITH CSA A23.3

PRODUCTION:
IN ACCORDANCE WITH CSA A23.4

CONCRETE:
IN ACCORDANCE WITH CSA A23.1

REINFORCING:
IN ACCORDANCE WITH WITH CSA G30.18
GRADE 400W

SEPTIC TANK (35,000L - 65,000L)

DRAWN BY:
JS

DATE:
AUG 2023



1645 SYDENHAM RD.
KINGSTON, ON

PHONE:
(800) 223-0012
1-613-546-6683

WWW.ANCHORCONCRETE.COM