



ISOMETRIC VIEW

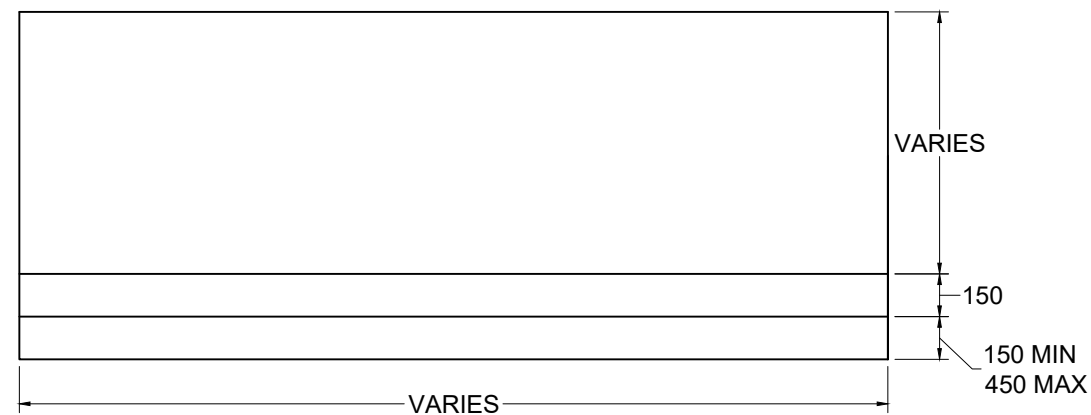

FRONT VIEW

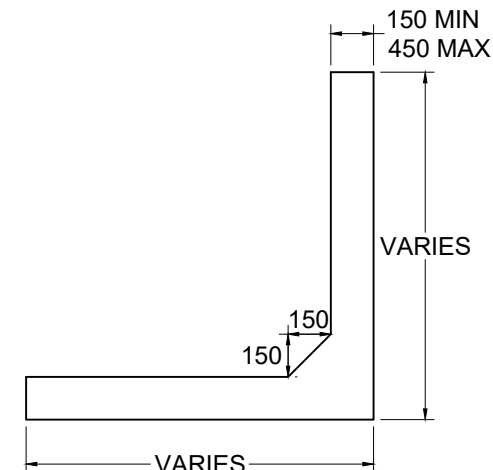

SIDE VIEW

NOTES:

ALL DIMENSIONS IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.

NOT TO SCALE

WEIGHT: VARIES BASED ON GEOMETRY

SUBBASE, BACKFILL, AND STRUCTURAL DETAILS ALL TO BE DESIGNED FOR EACH APPLICATION

OPENINGS, SKEWED ENDS AVAILABLE ON REQUEST

ANCHOR CONCRETE PRODUCTS LTD. ASSUMES NO LIABILITY FOR ANY SITE CONDITIONS. ALL DETAILS RELATED TO STABILITY OF FOUNDING CONDITIONS, EXCAVATIONS DEWATERING, BACKFILL, GEOMETRY, AND ASSOCIATED WORKS ARE THE SOLE RESPONSIBILITY OF THE GENERAL CONTRACTOR AND OR OWNER. A QUALIFIED GEOTECHNICAL ENGINEER IS TO BE RETAINED TO ASSESS SITE CONDITIONS AND VERIFY FOUNDING CONDITIONS.

ALL LIFTING ANCHORS ARE TO BE DAYTON SUPERIOR OR APPROVED ALTERNATIVE. ALL RIGGING, HOISTING, AND LIFTING TO BE IN STRICT ACCORDANCE WITH DAYTON SUPERIOR MANUAL.

SPECIFICATIONS:
PRODUCT DESIGNED IN ACCORDANCE WITH CSA A23.3, CSA S6 (CHBDC), OR AREMA AS REQUIRED.

PRODUCTION:
IN ACCORDANCE WITH CSA A23.4

CONCRETE:
IN ACCORDANCE WITH CSA A23.1
EXPOSURE CLASS: C1, 28 DAY COMP. STRENGTH: 35MPA, AIR ENTRAINMENT 5-8%

REINFORCING:
IN ACCORDANCE WITH WITH CSA G30.18 OR CSA S806
FRP REINFORCING AVAILABLE UPON REQUEST

L-WALL - VARIABLE GEOMETRY

DRAWN BY:
KK

DATE:
DEC 2024



1645 SYDENHAM RD.
KINGSTON, ON

PHONE:
(800) 223-0012
1-613-546-6683

WWW.ANCHORCONCRETE.COM