

NOTES:


ALL DIMENSIONS IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.

DO NOT TO SCALE.


STANDARD AND NON-CONDUCTIVE DIVIDERS AVAILABLE UPON REQUEST.

DUCT OPENINGS AVAILABLE UPON REQUEST.


BROOM FINISH ON LID AVAILABLE UPON REQUEST.

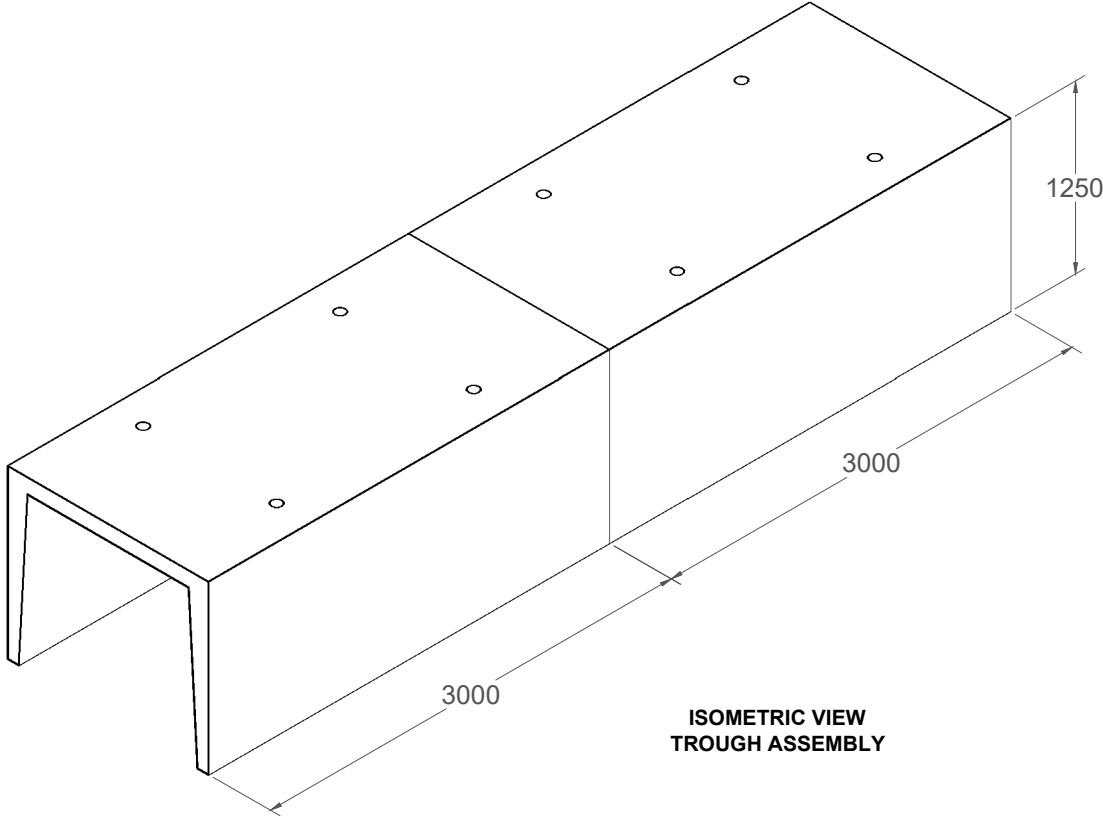

ISOMETRIC VIEW
TROUGH ASSEMBLY

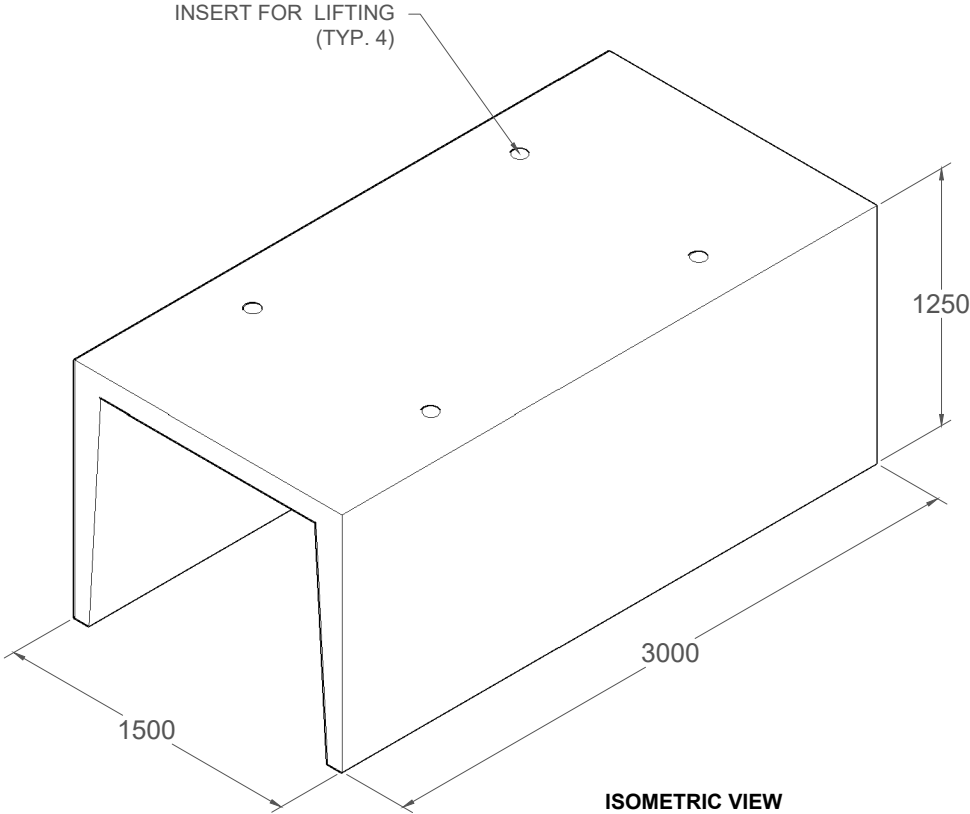

ISOMETRIC VIEW
TROUGH
3000mm x 1500mm x 1250mm
3050 KG

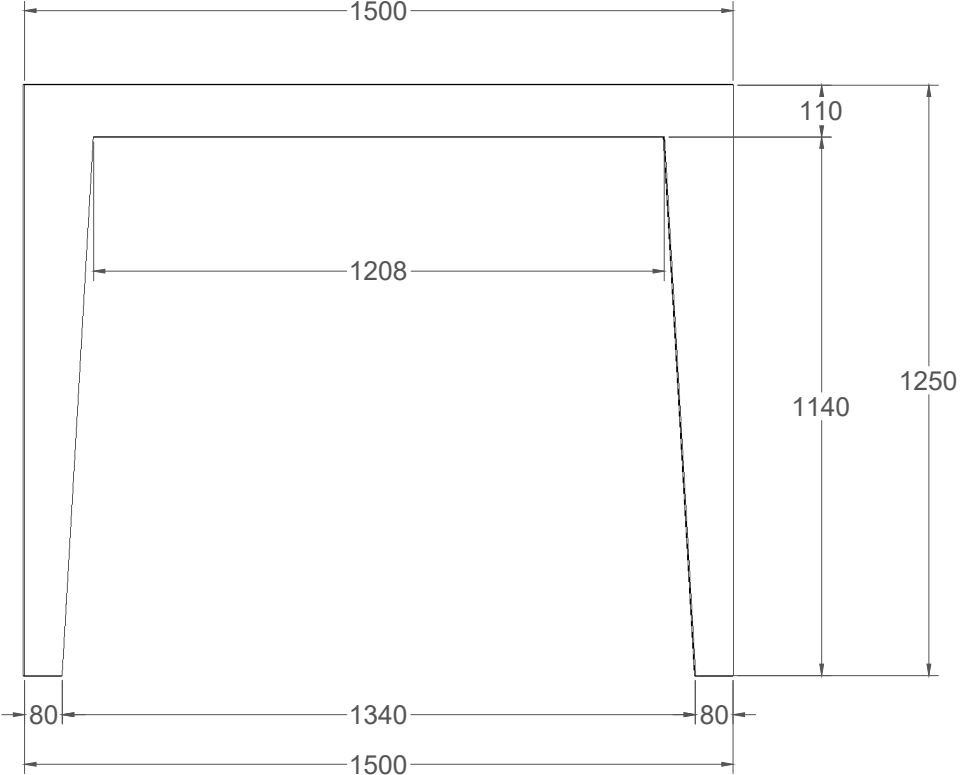

SECTION VIEW

SPECIFICATIONS:
PRODUCT DESIGNED IN ACCORDANCE WITH CSA A23.3

PRODUCTION:
IN ACCORDANCE WITH CSA A23.4

CONCRETE:
IN ACCORDANCE WITH CSA A23.1
28 DAY COMP. STRENGTH: 35MPA, AIR ENTRAINMENT 5-8%

REINFORCING:
IN ACCORDANCE WITH WITH CSA G30.18
GRADE 400W

ANCHOR TROUGH - 1208 x 1140



1645 SYDENHAM RD.
KINGSTON, ON

PHONE:
(800) 223-0012
1-613-546-6683

WWW.ANCHORCONCRETE.COM