

NOTES:


ALL DIMENSIONS IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.

DO NOT TO SCALE.


STANDARD AND NON-CONDUCTIVE DIVIDERS AVAILABLE UPON REQUEST.

DUCT OPENINGS AVAILABLE UPON REQUEST.


BROOM FINISH ON LID AVAILABLE UPON REQUEST.

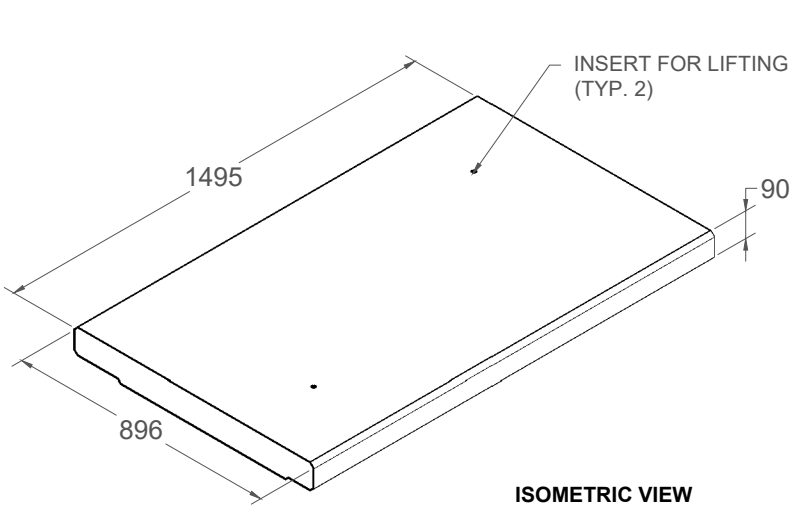


ISOMETRIC VIEW
LID
1495mm x 896mm x 90mm
315 KG

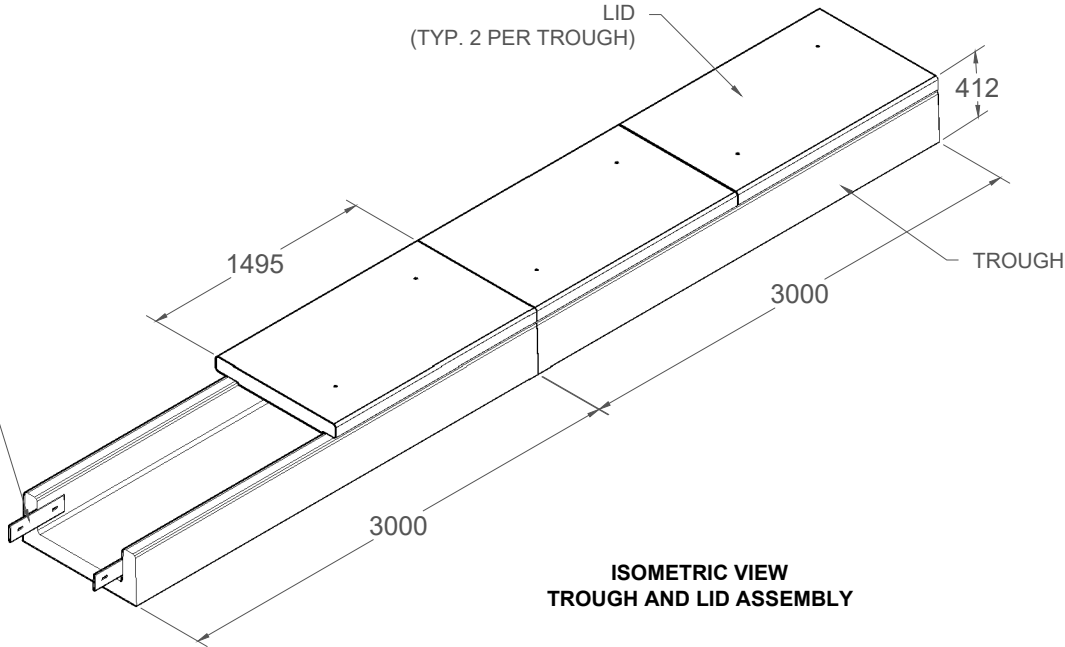

ISOMETRIC VIEW
TROUGH AND LID ASSEMBLY

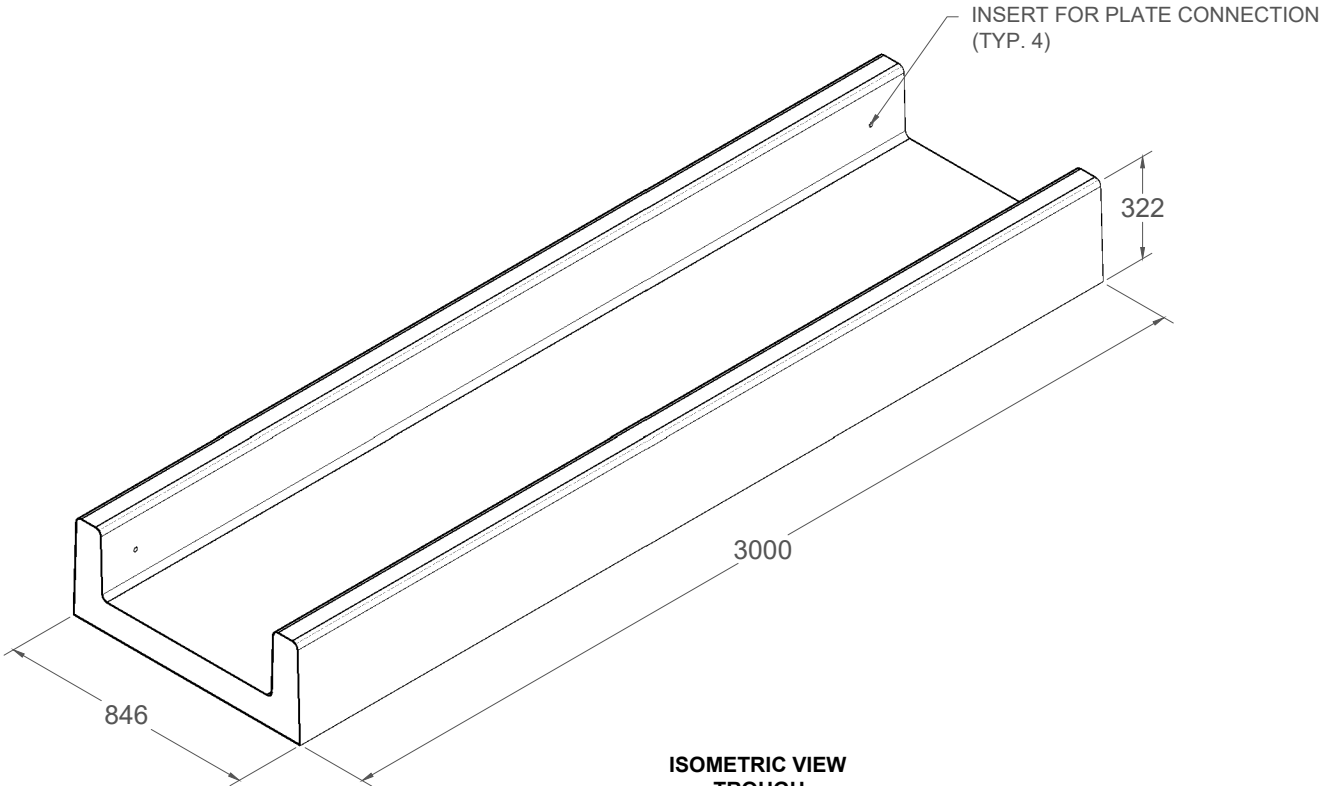

ISOMETRIC VIEW
TROUGH
3000mm x 846mm x 322mm
915 KG

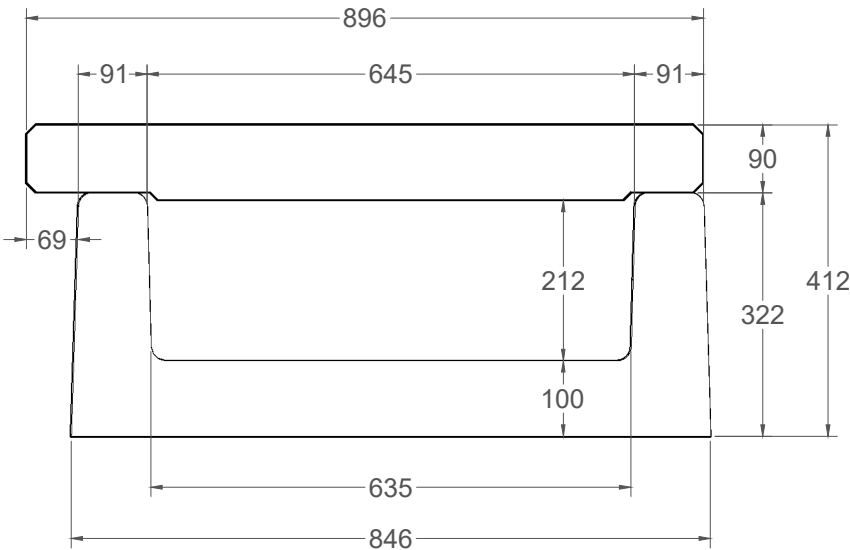

SECTION VIEW

SPECIFICATIONS:
PRODUCT DESIGNED IN ACCORDANCE WITH CSA A23.3

PRODUCTION:
IN ACCORDANCE WITH CSA A23.4

CONCRETE:
IN ACCORDANCE WITH CSA A23.1
28 DAY COMP. STRENGTH: 35MPA, AIR ENTRAINMENT 5-8%

REINFORCING:
IN ACCORDANCE WITH WITH CSA G30.18
GRADE 400W

ANCHOR TROUGH - 635 x 212



1645 SYDENHAM RD.
KINGSTON, ON

PHONE:
(800) 223-0012
1-613-546-6683

WWW.ANCHORCONCRETE.COM