

NOTES:

ALL DIMENSIONS IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.


DO NOT TO SCALE.

STANDARD AND NON-CONDUCTIVE DIVIDERS AVAILABLE UPON REQUEST.


DUCT OPENINGS AVAILABLE UPON REQUEST.

BROOM FINISH ON LID AVAILABLE UPON REQUEST.


LID FOR TROUGH AVAILABLE UPON REQUEST.

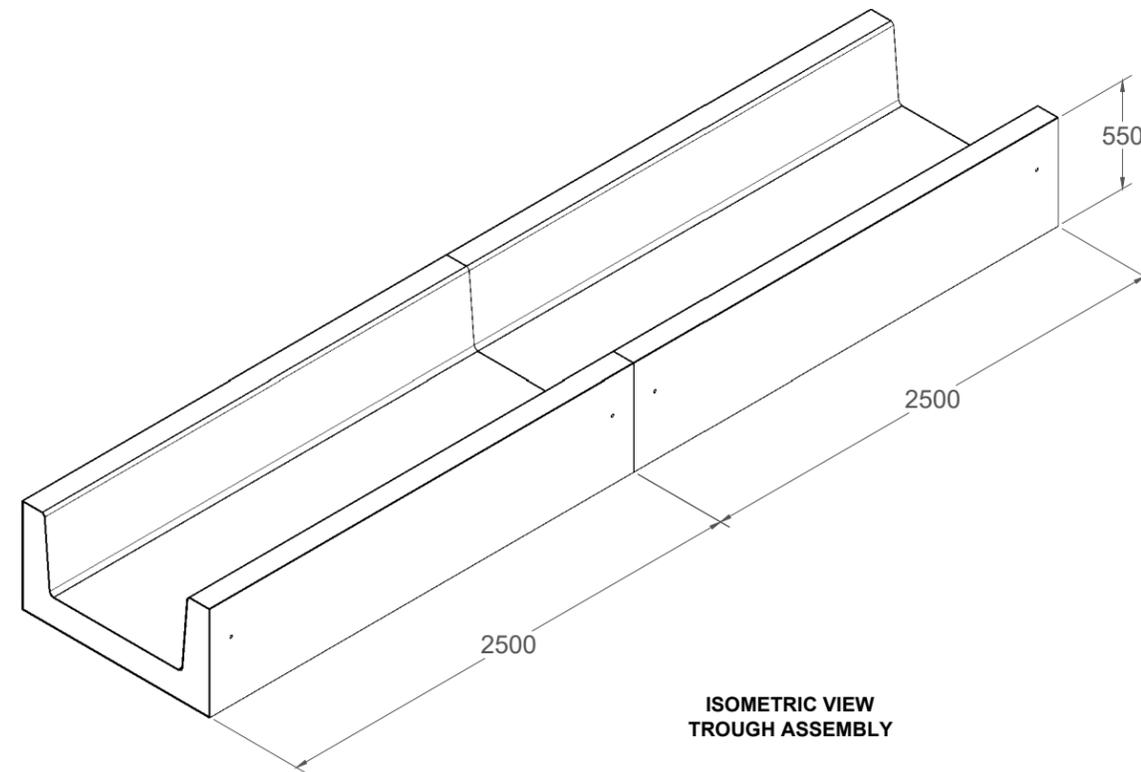

**ISOMETRIC VIEW
TROUGH ASSEMBLY**

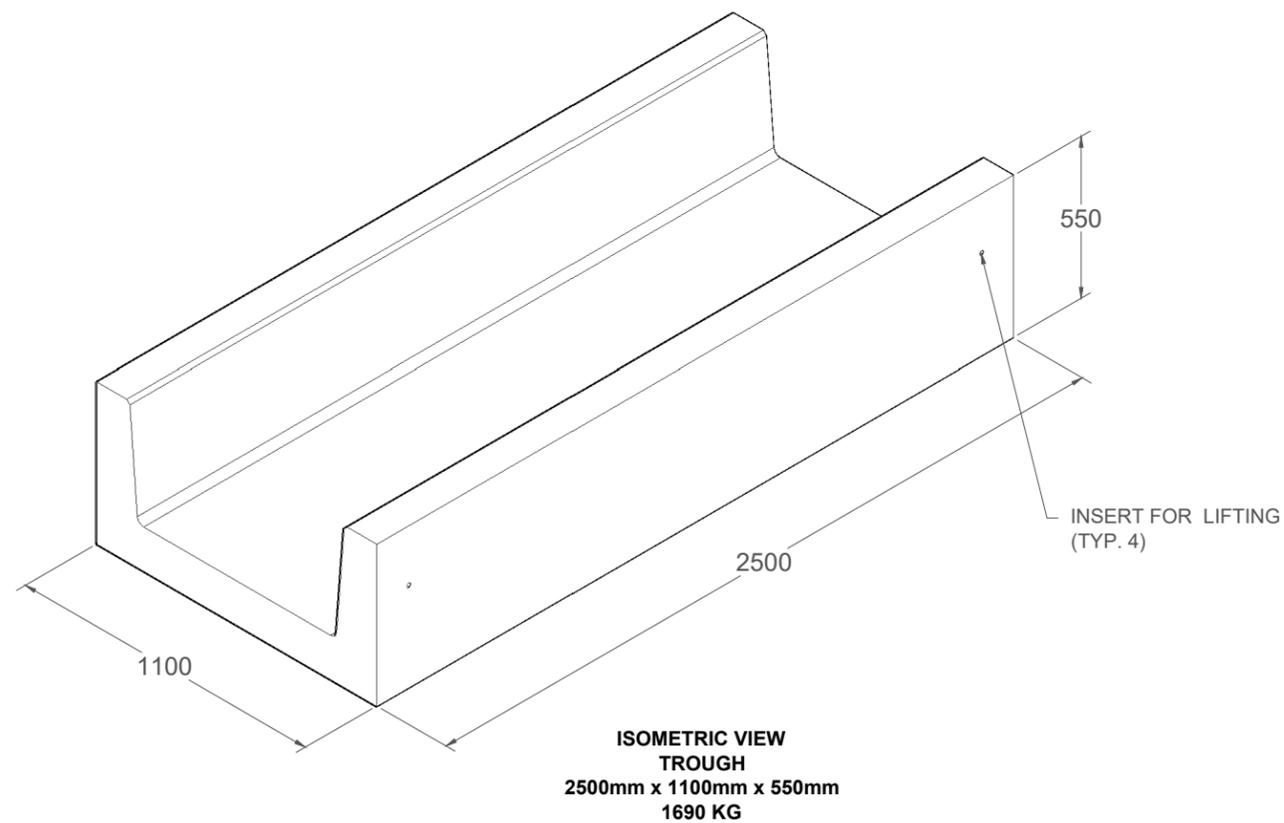

**ISOMETRIC VIEW
TROUGH
2500mm x 1100mm x 550mm
1690 KG**

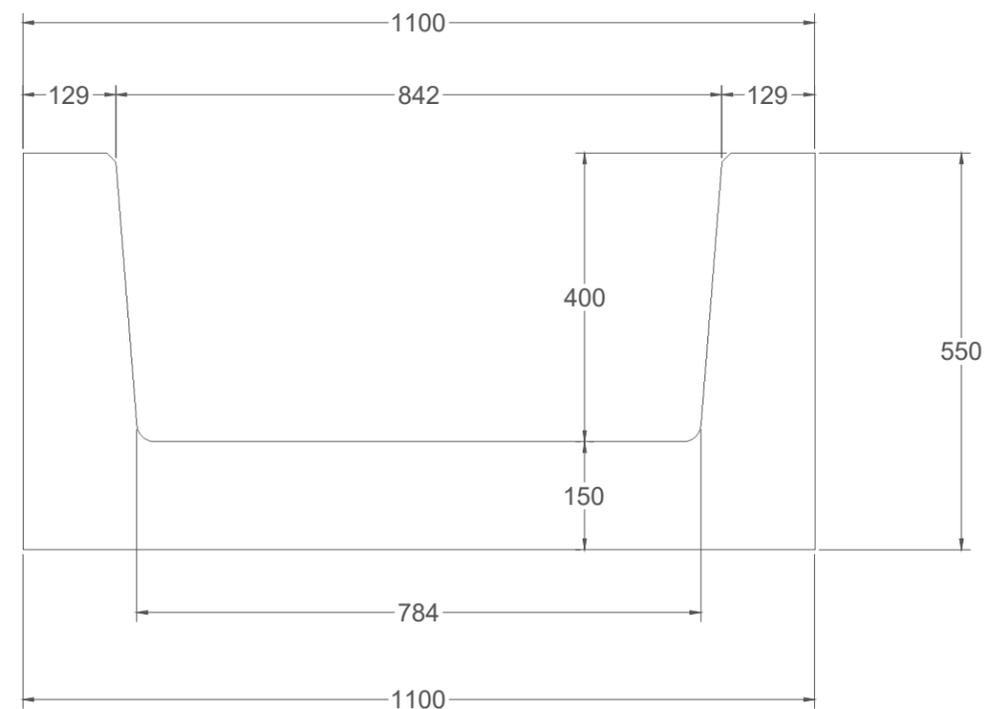

SECTION VIEW

SPECIFICATIONS:
PRODUCT DESIGNED IN ACCORDANCE WITH CSA A23.3

PRODUCTION:
IN ACCORDANCE WITH CSA A23.4

CONCRETE:
IN ACCORDANCE WITH CSA A23.1
28 DAY COMP. STRENGTH: 35MPA, AIR ENTRAINMENT 5-8%

REINFORCING:
IN ACCORDANCE WITH WITH CSA G30.18
GRADE 400W

ANCHOR TROUGH - 784 x 400



1645 SYDENHAM RD.
KINGSTON, ON

PHONE:
(800) 223-0012
1-613-546-6683

WWW.ANCHORCONCRETE.COM