

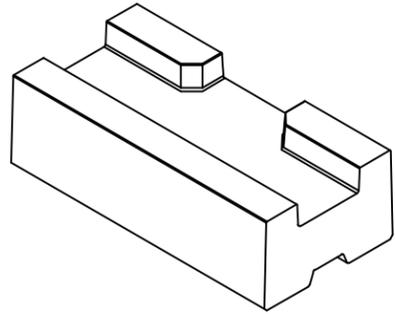




CURB TOP W/ RECESS
WEIGHT: 530kg

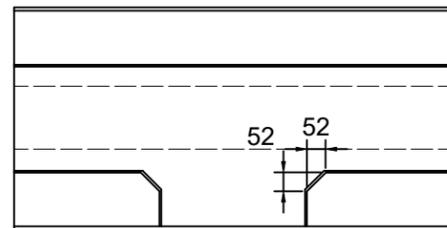



ISOMETRIC VIEW

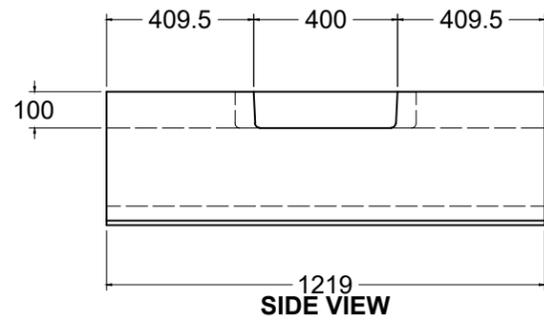


CURB TOP W/O RECESS
WEIGHT: 640kg

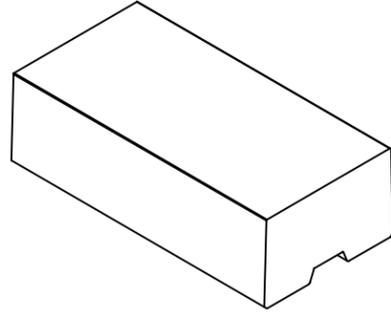




ISOMETRIC VIEW

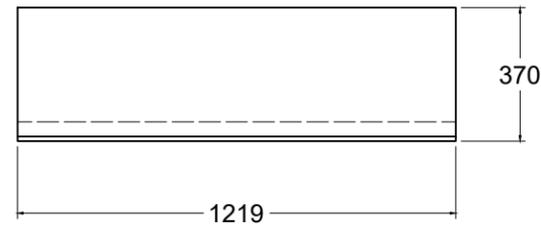

CURB BASE
WEIGHT: 460kg

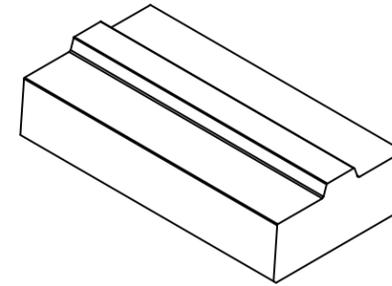

ISOMETRIC VIEW

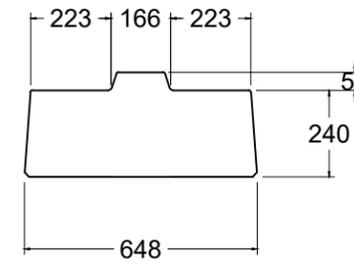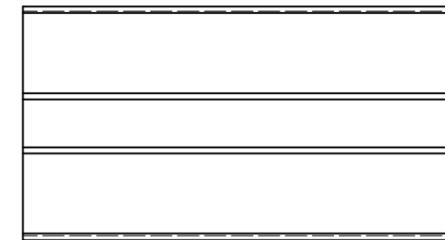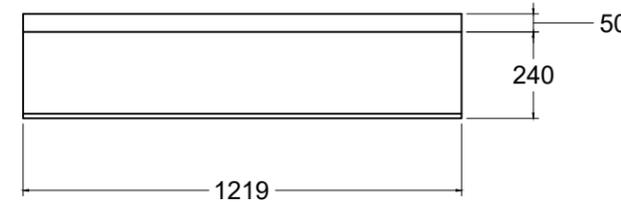

NOTES:



ALL DIMENSIONS IN MILLIMETERS UNLESS OTHERWISE STATED.

NOT TO SCALE

APPROVED FOR USE ON METROLINX PROJECTS

PRODUCT DIMENSIONS CONFORM TO METROLINX DWG PC-001 WITH THE FOLLOWING EXCEPTIONS:

- 10mm TAPER ON TOPS
- 18mm TAPER ON BOTTOMS
- 6mm ROUNDED EDGES OR 13mm CHAMFER

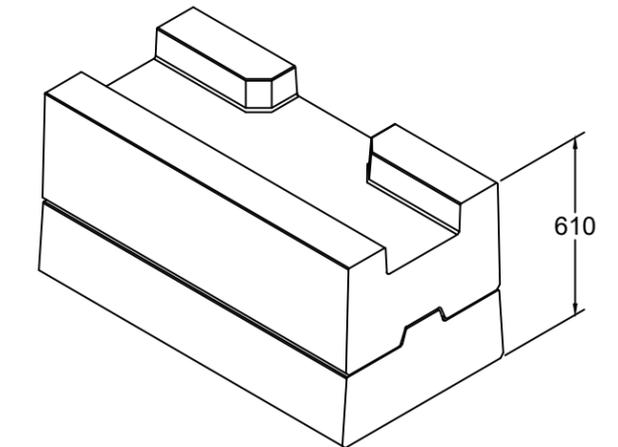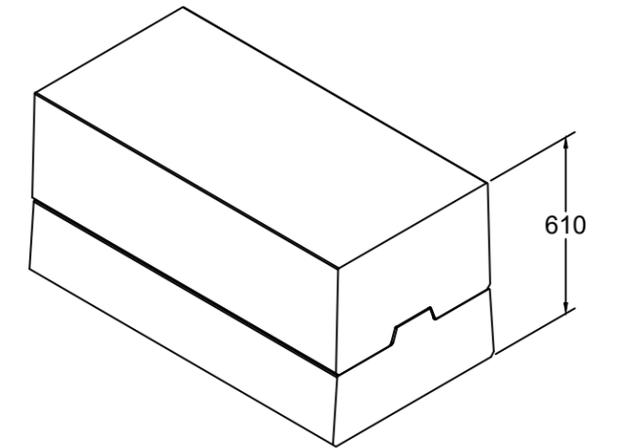

ASSEMBLED VIEWS

SPECIFICATIONS:
PRODUCT DESIGNED IN ACCORDANCE WITH CSA A23.3

PRODUCTION:
IN ACCORDANCE WITH CSA A23.4

CONCRETE:
IN ACCORDANCE WITH CSA A23.1
EXPOSURE CLASS: C1, 28 DAY COMP. STRENGTH: 35MPA, AIR ENTRAINMENT 5-8%

REINFORCING:
IN ACCORDANCE WITH WITH CSA G30.18
GRADE 400W CLEAR COVER = 65 ±10

METROLINX CURB

DRAWN BY:
JS

DATE:
AUG 2023



1645 SYDENHAM RD.
KINGSTON, ON

PHONE:
(800) 223-0012
1-613-546-6683

WWW.ANCHORCONCRETE.COM